

Data sheet


Pass-Through Sterilizer SRWP 115 Smart



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Advantages of the SMART controller:

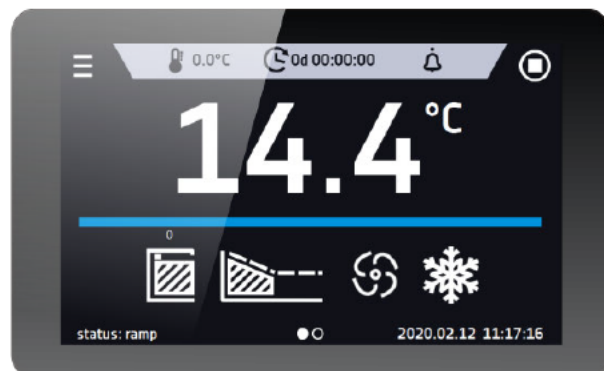- 4,3", clear, full colour touch screen
- LAN, USB ports for data transfer
- multi-segment time and temperature programs
- visual and sound alarm
- internal memory for programs and data storage
- event registry
- user manual for direct download
- Quick change of program parameters
- Alarm Bar
- operating with gloves on



Smart - preview screen

TECHNICAL DATA

air convection	forced
chamber capacity [l]	105
working capacity [l]	105
controller	microprocessor PID
display	4,3 full colour touch screen

TEMPERATURE


temperature range [°C]	5°C above ambient temperature ... +250°C
temperature resolution every ... [°C]	0,1
over temperature protection	class 2.0 to DIN 12880 / class 3.1 (option)

CHAMBER

door type	solid
interior	
Smart	DIN 1.4301
IG Smart	DIN 1.4301
housing	
Smart	powder coated sheet
IG Smart	stainless steel linen finish

overall dims [mm] /1/

width A	700
height B	910
depth C	700
internal dims [mm]	
width D	460
height E	530
depth F	430

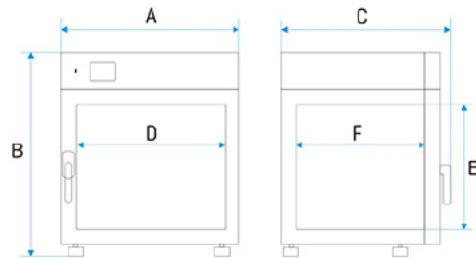

shelves (standard max)	2 7
max shelf workload [kg] /2/	10
- reinforced shelf version (PW) [kg] /3/	50
max unit workload [kg]	60
- reinforced unit version (W) [kg] /4/	120
weight [kg]	65

ELECTRICAL PARAMETERS

voltage**	230V 50-60Hz
nominal power [W]	2500
warranty	24 months
manufacturer	POL-EKO-APARATURA
txt_opis pod tabelą	<p>all the above technical data refer to standard units (without optional accessories)</p> <p>* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as: $K = \frac{T_{\text{average max.}} - T_{\text{average min.}}}{2}$</p> <p>** - other power supplies on request</p> <p>1 - depth doesn't include 50 mm of power cable 2 - on uniformly loaded surface 3 - reinforced shelf 4 - reinforced version</p>

all the above technical data refer to standard units (without optional accessories)

* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:
 $K = \frac{T_{\text{average max.}} - T_{\text{average min.}}}{2}$

** - other power supplies on request

1 - depth doesn't include 50 mm of power cable
 2 - on uniformly loaded surface
 3 - reinforced shelf
 4 - reinforced version

OPTIONS AND ACCESSORIES




Order number: */A

door with viewing window



Order number: */P INOX

Stainless steel wire shelf INOX



Order number: */PP

Perforated shelf



Order number: */PW

Reinforced shelf



Order number: KUW GN*/*

Stainless steel cuvettes



Order number: OWW/OWW LED

Interior lighting




Order number: HEPA

HEPA Clean Air Filter













Order number: LabDesk

LabDesk software



Order number: BRT*/L or IQ/OQ/PQ

Calibration and IQ, OQ, PQ qualification

 DIN 3.1	Order number: */3.1	Over temperature protection 3.1 class according to DIN 12880
 Battery	Order number: BPP 12	Battery backup for display
 ALARM	Order number: PORT ALARM	Dry alarm contact
 USB	Order number: USBK	USB cable
 LAN	Order number: LANK	LAN cable
 20mm	Order number: OCZ/20	Non-standard access port 20 mm
 30mm	Order number: OCZ/30	Additional access port 30 mm
 60mm	Order number: OCZ/60	Non-standard access port 60 mm
 100mm	Order number: OCZ/100	Non-standard access port 100 mm
 Access control	Order number: KD	Access control