Pesticide







EN 14470-2 SAFETY CABINETS TYPE 30-MINUTES FOR GAS CYLINDERS












Mounting rails with tension belt - P/N RH4BG / RH5BG (option)



Standardized labeling



Shelf for one small gas cylinder -P/N EG1 (option)



Key locking system



Vent with thermo-fuse

To protect the users health and to improve the life cycle of your safety cabinet, we recommend to installan exhausting system. Do not hesitate to contact-us for more information.



Cooling system

To increase the security of your cabinet and control the temperature inside, we propose you a cooling system. Ask-us for more information.



RANGE 7630BG

EN 14470-2 EN 1363-1







CERTIFICATION

- Tested and approved Type 30-minutes according to EN 14470-2 (04/2006) and EN 1363-1 (06/2000).
- Normalized labelling according to ISO 3864, and EN 14470-2 norms, and 92/58/CEE european directive.

ADVANTAGES

- 30-minutes fire resistance according to ISO 834 fire heating curve.
- Tested and approved with ISO 834 fire heating curve by an European laboratory.
- Pedestal area under-driveable by a forklift by removing panel.

PASSIVE SECURITY


- Built in double wall melamine (thickness: 76mm) : overall good chemical resistance.


- Grey structure (RAL 7035), yellow edges (RAL 1023).
- Safety labelling as per EN 14470-2.


ACTIVE SECURITY

- Ø 100 mm air inlet and outlet ducts for either natural ventilation or connection with forced ventilation/filtration system.
- Thermo-expanding seals of the door allow keeping the internal body fireproof.
- In case of fire, a thermo-fuse automatically seals off the ventilation system.
- Adjustable leveling feet for enhancing stability.
- Locking door(s) with cylinder lock.

All models are delivered without interior equipment. They have, therefore, to be equipped with rails for supporting the gas cylinders, and access ramp...

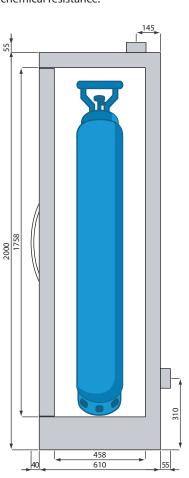

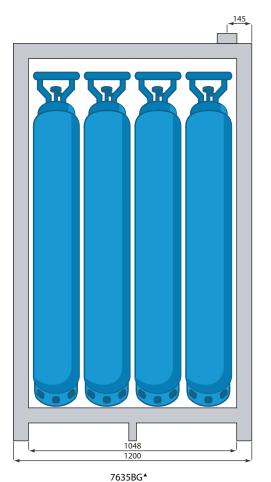

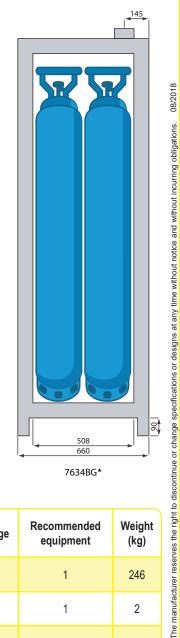

| 5 : | Outside Dim. | Inside Dim. | B50 | Recommen | |
|------------------------|--------------|----------------|------|----------|--|
| 7634BG-7635BG ^ | 70 | 635BG ^ | 763· | | |

| P/N | Description | Outside Dim. H x W x D (mm) | Inside Dim. H x W x D (mm) | B50 cylinder storage capacity | Recommended equipment | Weight (kg) |
|--------|--|--------------------------------|-------------------------------|-------------------------------------|-----------------------|----------------|
| 7634BG | Tall cabinet 1 door | 2055 x 660 x 665 | 1753 x 508 x 458 | 2 | 1 | 246 |
| RH4BG | Horizontal rail for mounting 2 cylinders B50 | - | - | - | 1 | 2 |
| 7635BG | Tall cabinet 2 doors | 2055 x 1200 x 665 | 1753 x 1048 x 458 | 4 | 1 | 447 |
| RH5BG | Horizontal rail for mounting 4 cylinders B50 | - | - | - | 1 | 3 |
| RABG | Galvanized steel ramp for 7634BG or 7635BG | 38 x 450 x 398 | - | - | 1 | 10 |
| EG1 | Additional shelf for 1 gas cylinder type B2, B5, B10, B11, B15 or B20 | 245 x 245 x 245 | - | - | - | 3 |