

Data sheet

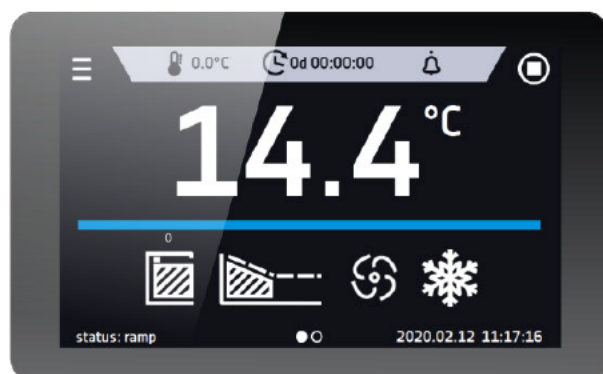
Laboratory Freezer ZLN 85 Smart



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Advantages of the SMART controller:

- 4,3", clear, full colour touch screen
- LAN, USB ports for data transfer
- multi-segment time and temperature programs
- visual and sound alarm
- internal memory for programs and data storage
- event registry
- user manual for direct download
- Quick change of program parameters
- Alarm Bar
- operating with gloves on



Smart - preview screen

TECHNICAL DATA

air convection	natural
chamber capacity [l]	85
working capacity [l]	73
controller	microprocessor PID
display	4,3 full colour touch screen
insulation type	polyurethane foam

TEMPERATURE

temperature range [°C]	-25...0
temperature resolution every ... [°C]	0,1
temperature fluctuation at -20°C [±/°C]*	0,5
temperature variation at -20°C [±/°C]*	2,0
over temperature protection	class 3.2 to DIN 12880 (option)

CHAMBER

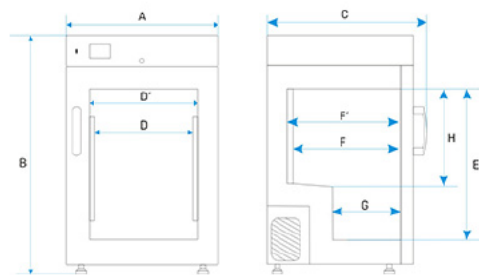
door type	solid
interior	
C Smart	stainless steel to DIN 1.4016
CS Smart	stainless steel to DIN 1.4016
P Smart	DIN 1.4301
PS Smart	DIN 1.4301
housing	
C Smart	powder coated sheet
CS Smart	stainless steel polished
P Smart	powder coated sheet
PS Smart	stainless steel polished

overall dims [mm] /1/

width A	620
height B	930
depth C	650

internal dims [mm]

width D	380
width D'	420
height E	590
depth F	400
depth F'	440
depth G	230
height H	380



shelves (standard max)	2 4
max shelf workload [kg] /2/	10
max unit workload [kg]	30
weight [kg]	62

ELECTRICAL PARAMETERS

voltage**	230V 50-60Hz
nominal power [W]	200
refrigerant	R290 / GWP=36
warranty	24 months
manufacturer	POL-EKO-APARATURA
txt_opis pod tabelą	<p>all the above technical data refer to standard units (without optional accessories)</p> <p>* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as: $K = \pm (T \text{ average max.} - T \text{ average min.}) / 2$</p> <p>** - other power supplies on request</p> <p>1 - depth doesn't include 50 mm of power cable 2 - on uniformly loaded surface 3 - reinforced shelf 4 - reinforced version</p>










all the above technical data refer to standard units (without optional accessories)







* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:
 $K = \pm (T \text{ average max.} - T \text{ average min.}) / 2$

** - other power supplies on request

1 - depth doesn't include 50 mm of power cable
 2 - on uniformly loaded surface
 3 - reinforced shelf
 4 - reinforced version

OPTIONS AND ACCESSORIES

	Order number: */P INOX	Stainless steel wire shelf INOX
	Order number: */PP	Perforated shelf
	Order number: KUW GN*/*	Stainless steel cuvettes
	Order number: QLK*	Wheels
	Order number: */S or */S INOX	Table with wheels
	Order number: */ST or */S INOX	Base on castors
	Order number: OWW/OWW LED	Interior lighting
	Order number: LabDesk	LabDesk software
	Order number: BRT*/L or IQ/OQ/PQ	Calibration and IQ, OQ, PQ qualification

	Order number: */3.2	Over temperature protection 3.2 class according to DIN 12880
	Order number: BPP 12	Battery backup for display
	Order number: PORT ALARM	Dry alarm contact
	Order number: USBK	USB cable
	Order number: LANK	LAN cable
	Order number: KD	Access control